




## INSTALLATION MANUAL

### CT-SAW55 Audio/Video Modulator

---

#### ***IMPORTANT INFORMATION***

---



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

**WARNING :** TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE. DO NOT OPEN THE CABINET, REFER SERVICING TO QUALIFIED PERSONNEL ONLY.

## PACKAGE CONTENTS

This package contains:

- One CT-SAW55 SAW-Filtered Audio/Video Modulator
- One CT-SAW55 instruction manual

## PRODUCT DESCRIPTION

The **CT-SAW55** is an all solid-state audio/video modulator that provides a modulated video and aural RF carrier output on a fixed channel from 54MHz to 361MHz. The modulator accepts standard polarity video at a 0.7-2.5 Vp-p level from video sources such as a satellite receiver, demodulator, TV camera, DVD player or video tape recorder. The unit provides high quality video, color, and audio signals on any unused channel within a closed circuit MATV, SMATV, or CATV system. For easy operation, all level controls are located on the front panel.

## SPECIFICATIONS

### CT-SAW55

SAW-Filtered Audio/Video Modulator Specifications (Typical)

<b>RF</b>	
1.Output Level	+55 dBmV
2.Output Level Range	15 dB (Continuously Adjustable)
3.A/V Carrier Ratio Control	-12 dB to -18 dB (Continuously Adjustable)
4.Spurious Output	60 dBc @55 dBmV Output
5.Frequency Accuracy/Stability	±5 KHz
6.Output Impedance	75 Ohms
7.Output Return Loss	12 dB Min.
8.Video Modulation Depth	87.5% TYP. (@Video 1 Vp-p)
<b>VIDEO</b>	
1.Video Input Level	1 Vp-p @87.5% Modulation
2.Differential Gain	3% @87.5% modulator
3.Differential Phase	±3° @87.5%Modulation
4.Video S/N Ratio	60 dB
5.Visual Carrier to Noise Ratio	60 dB
6.Video Response	±1.5 dB
<b>AUDIO</b>	
1.Input Level	0.5 Vp-p for ±25 KHz Deviation

2.Input Impedance	600 Ohms Unbalanced
3.Audio Distortion	0.80%
4.Aural Frequency	4.5 MHz $\pm$ 5 KHz
5.Audio Frequency Response	$\pm$ 1.0 dB
6.Pre-Emphasis	75 $\mu$ Sec
<b>GENERAL</b>	
1.Power Input Range	106 V ~ 127 VAC, 60 Hz
2.Operating Temperature	32 °F ~ 122 °F
3.Connectors	All "F" Type
<b>MECHANICAL</b>	
1.Dimensions	19" (W) x 1-3/4" (H) x 3" (D)
2.Weight	4 Lbs

## INSTALLATION AND OPERATION

### NOTE TO SYSTEM INSTALLER

System installer must adhere to Article 820-40 of the NEC that provides guidelines for proper grounding and specifies that the cable ground shall be connected to *the grounding system of the building*, as close to the point of cable entry as practical.

#### 1. UNPACKING and HANDLING


Each unit is shipped with all equipment assembled, and factory tested.

Ensure that all accessories are removed from the container before discarding packing material

#### 2. MECHANICAL INSPECTION

Inspect the front and rear of the equipment for shipping damage. Make sure the equipment is clean, and no connectors are broken, damaged, or loose. If equipment appears to be damaged or defective please contact us at 1-610-429-1511 for assistance.

### 3. PRODUCT DIAGRAM

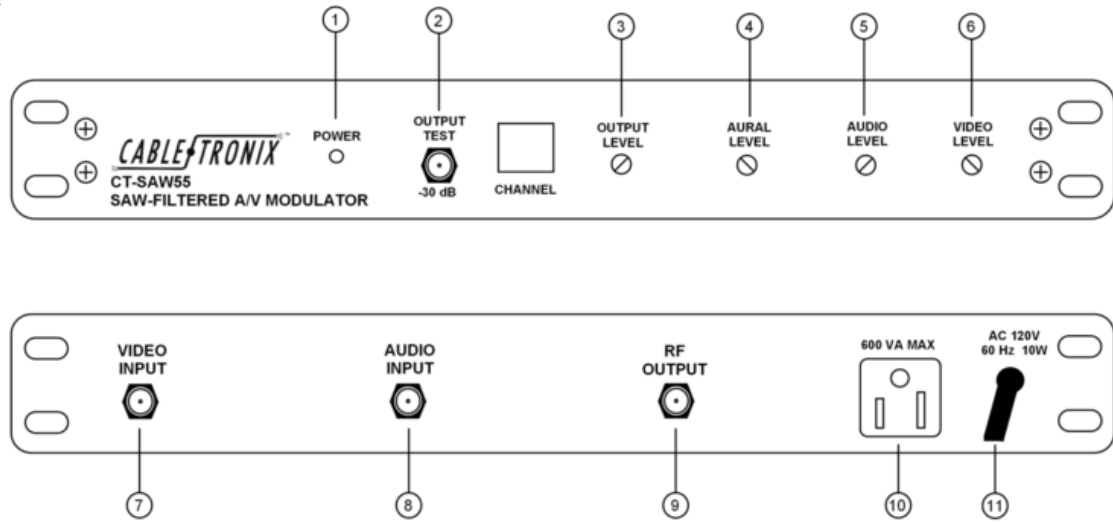

- |    |                           |   |
|----|---------------------------|---|
| 1  | <b>Power</b>              | “Power-On” indicator light  |
| 2  | <b>Output Test</b>        | The input signal is tapped down –30dB for monitoring.<br>Test port must be terminated when not in use         |
| 3  | <b>Output Level</b>       | Simultaneously adjusts amplitude of aural and visual carriers   |
| 4  | <b>Aural Level</b>        | Controls amplitude of aural RF carrier to change aural/video ratio  |
| 5  | <b>Audio Level</b>        | Adjusts for 25KHz peak deviation  |
| 6  | <b>Video Level</b>        | Adjusts depth of modulation when video level is greater than 1.5Vp-p terminated signal                        |
| 7  | <b>Video Input</b>        | F-connector accepts a video signal from a source such as a satellite receiver, demodulator, or DVD player     |
| 8  | <b>Audio Input</b>        | F-connector accepts audio signal from a video source such as a satellite receiver, demodulator, or DVD player |
| 9  | <b>RF Output</b>          | The modulated output signal is available for distribution from the F-connector                                |
| 10 | <b>Convenience Outlet</b> | Allows looping of power among units   |
| 11 | <b>Power Cord</b>         | For 120VAC, 60Hz  |

#### 4. HARDWARE CONNECTIONS

- a. The CT-SAW55 is designed for installation in a standard 19" ELA rack.
- b. Connect a 75ohm coaxial cable with F-connectors from the video source's Audio Output port to the CT-SAW55's Audio Input port.
- c. Connect a 75ohm coaxial cable with F-connectors from the video source's Video Output port to the CT-SAW55's Video Input port.
- d. Connect a 75ohm coaxial cable with F-connectors from the CT-SAW55's RF Output port to the headend combiner.
- e. Connect the CT-SAW55 to an appropriate power source capable of powering this device. Be certain that power source is capable of handling the load if the CT-SAW55 and other equipment are being powered by it.

#### 5. CHANNEL SELECTION

The CT-SAW55 is a fixed frequency modulator and units are pre-programmed for a single given channel at the factory. No channel selection is available from the unit.

#### 6. ADJUSTMENT

- a. After installation and completing all hardware connections power the unit and wait 20 minutes before making the following adjustments.
- b. For testing purposes no more than 15dB from the **RF Output** should be going to a TV or RF input monitor. Use an attenuator to reduce the signal level if testing with an RF Input monitor. Individual CT-SAW55 setup and level settings can be tested from the **RF Output** port. However, system level testing should be done from the combiner.
- c. With a nominal 1 Vp-p video source connected, adjust the **VIDEO LEVEL** control fully clockwise. The circuit will automatically set the unit for 87.5% modulation over an input level of 0.7 to 1.5 volts peak-to-peak. If the video input is greater than 1.5Vp-p, adjust the **VIDEO LEVEL** for correct percentage of modulation (87.5%). If test equipment is not available then adjust for proper picture contrast when viewed on a TV monitor and compare with known Off-Air broadcast picture quality.
- d. With audio source connected, adjust **AUDIO LEVEL** control on the front panel for 25 KHz deviation. Instead of an audio modulation meter, use a TV set and adjust for equal volume as compared to a known Off-Air broadcast. Monitor for a few minutes to assure the maximum volume does not over modulate, which can cause picture distortion.
- e. During field maintenance of the headend the CT-SAW55's **Output Test** port can be used for taking unit measurements. However, note the output from the port is padded down -30 dB and must be taken into consideration when adjusting levels.

#### 7. FREQUENCY OF OPERATION

The **CT-SAW55** can be ordered in the following channels. The FCC 21006 offsets are automatically factory set positive. The channel chart is listed below.

BAND	CHANNEL		FREQUENCY		FCC 21006 OFFSET	VIDEO CARRIER	CRYSTAL CARRIER
	NUM	LTR	BAND	EDGE			
LOW BAND	2		54	60		55.25	59.75
	3		60	66		61.25	65.75
	4		66	72		67.25	71.75
	5		76	82		77.25	81.75
	6		82	88		83.25	87.75
	95	A-5	90	96		91.25	95.75
	96	A-4	96	102		97.25	101.75
MID BAND	97	A-3	102	108		103.25	107.75
	98	A-2	108	114	+ 25kHz	109.275	113.775
	99	A-1	114	120	+ 25kHz	115.275	119.775
	14	A	120	126	+12.5kHz	121.2625	125.7625
	15	B	126	132	+12.5kHz	127.2625	131.7625
	16	C	132	138	+12.5kHz	133.2625	137.7625
	17	D	138	144		139.25	143.75
	18	E	144	150		145.25	149.75
	19	F	150	156		151.25	155.75
	20	G	156	162		157.25	161.75
	21	H	162	168		163.25	167.75
	22	I	168	174		169.25	173.75
HI BAND	7		174	180		175.25	179.75
	8		180	186		181.25	185.75
	9		186	192		187.25	191.75
	10		192	198		193.25	197.75
	11		198	204		199.25	203.75
	12		204	210		205.25	209.75
	13		210	216		211.25	215.75
SUPER BAND	23	J	216	222		217.25	221.75
	24	K	222	228		223.25	227.75
	25	L	228	234	+12.5kHz	229.2625	233.7625
	26	M	234	240	+12.5kHz	235.2625	239.7625
	27	N	240	246	+12.5kHz	241.2625	245.7625
	28	O	246	252	+12.5kHz	247.2625	251.7625
	29	P	252	258	+12.5kHz	253.2625	257.7625
	30	Q	258	264	+12.5kHz	259.2625	263.7625
	31	R	264	270	+12.5kHz	265.2625	269.7625
	32	S	270	276	+12.5kHz	271.2625	275.7625
	33	T	276	282	+12.5kHz	277.2625	281.7625
	34	U	282	288	+12.5kHz	283.2625	287.7625
	35	V	288	294	+12.5kHz	289.2625	293.7625
	36	W	294	300	+12.5kHz	295.2625	299.7625
	37	AA	300	306	+12.5kHz	301.2625	305.7625
	38	BB	306	312	+12.5kHz	307.2625	311.7625
	39	CC	312	318	+12.5kHz	313.2625	317.7625
40	DD	318	324	+12.5kHz	319.2625	323.7625	
41	EE	324	330	+12.5kHz	325.2625	329.7625	
42	FF	330	336	+12.5kHz	331.2625	335.7625	
43	GG	336	342	+12.5kHz	337.2625	341.7625	
44	HH	342	348	+12.5kHz	343.2625	347.7625	
45	II	348	354	+12.5kHz	349.2625	353.7625	
46	JJ	354	360	+12.5kHz	355.2625	359.7625	
47	KK	360	366	+12.5kHz	361.2625	365.7625	

## 8. TROUBLESHOOTING

- a. Ensure you are using quality multiple shielded cables with quality radial or compression F-connectors.
- b. Ensure the F-connector's center conductor is making solid contact with the C-SAW55's **Video Input, Audio Input, and RF Output** ports.
- c. If the CT-SAW55 is receiving power but no signal, check to be sure the video and/or audio input cables are securely connected with their respective Video Output and Audio Output ports on the video source and the Video Input and Audio Input ports on the CT-SAW55. Also ensure the cable is securely connected at the CT-SAW55's **RF Output** port and the combiner's input ports.
- d. When taking measurements it is always best to use a quality signal level meter. For initial individual CT-SAW55 setup measurements may be taken from the unit's RF Output port. System level measurements, however, should be taken from the combiner's output. For field maintenance, the CT-SAW55's Output Test port may be used. However, note that port is padded down -30dB that must be taken into consideration when determining individual unit level settings and output.
- e. Further troubleshooting assistance can be found on-line at [www.northamericancable.com](http://www.northamericancable.com) and [www.cabletronix.com](http://www.cabletronix.com) in addition to support from Cabletronix sales engineers at 1-610-429-1511.