

Features:

- Direct input by frequency from 55.25 MHz - 865.25 MHz
- Direct input by channel number
- DVB average power measurement.
- Measures QAM 64/256, DVB-C, BER & MER
- Simultaneously displays video carrier and audio carrier strength, and V/A measurement
- Switchable between dBmV and dBμV
- Tilt measurement of three user definable channels
- Carrier-to-noise ratio measurement
- Trunk voltage measurement
- Large 2 5/8" x 1 3/4" dot matrix LCD display with back light
- Battery powered handheld model with internal NiMH battery and included charger
- Rugged, compact and mobile rubber jacketed housing
- Battery life ≈ 5 hours



Description:

The CT-DLM870D is a handheld signal level meter is designed to provide the most valuable features at reduced cost. It performs fast and efficiently to take carrier amplitude measurements. It can also take the direct power measurement of DVB signals. This unit simultaneously displays video carrier, audio carrier strength, V/A measurements, Tilt measurement, C/N measurement and Trunk voltage measurement. This unit is perfect for balancing digital QAM and analog headend systems, reading digital off air signal levels, troubleshooting RF distribution systems and taking measurements at individual drops. With the ability to read individual audio and video carriers along with line voltage and carrier to noise levels, the CT-DLM870D is perfect for all levels of installers and technicians.


The full-scan option and spectrum option provide the ability to view the carrier amplitude in a full-span display and spectrum analysis. The new digital analysis option adds digital signal testing that includes Bit Error Rate (BER) and Modulation Error Rate (MER). The internal high volume NiMH battery supports up to 5 hours of continuous use after a full charge. This unit is durable and simple to use in a wide range of conditions. The tough plastic housing makes this unit highly resistant to damage from shock and impact. The CT-DLM870D has a 2 5/8" x 1 3/4" enlarged color LCD and the new screen graphics enhance readability and simplify operations.

Contents Include:

- 1 Meter
- 1 Instruction manual
- Two Replacement F Barrels
- 1 AC Charger
- 1 Carrying Strap

Description:

CT-DLM870D	Signal level meter
CT-DLM870D-BATT	Replacement battery for CT-DLM870D
CT-DLM-CABLE	Interconnect cable, meter to PC via RS232C

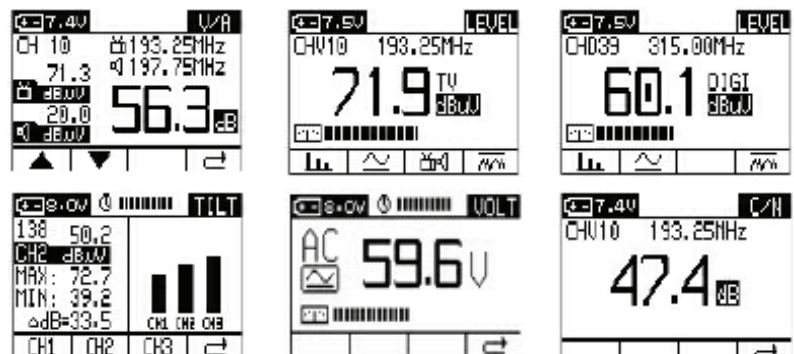

Specifications:

Frequency

Range: 55.25 MHz - 865.25 MHz
 Resolution: 10 KHz
 Bandwidth: 280 KHz

Carrier-Noise Ratio (C/N)

Input range: >70 dBuV
 Accuracy: ±2 dB
 Resolution: 0.1 dB

Channel Type

Analog TV: NTSC Standard
 Digital TV: QAM, QPSK
 FM channel: Single frequency

Tilt measurement

Number of channels: 3
 Resolution: 0.1 dB

Level Measurement

Range: 25 dBuV - 120 dBuV
 Accuracy: ±1.5dB
 Resolution: 0.1dB
 Input Impedance: 75 Ohm
 Wave detection: Peak value

Trunk Voltage measurement

Input range: 0-100VAC
 Accuracy: ± 1.5V Resolution 0.1V

QAM Analysis

Modulation type: 64/256 QAM DVB-C; ITU-TJ.83-AnnexB
 Symbol Rate: 1.00 Mbps ~7.00 Mbps
 Bandwidth: 6MHz~10MHz
 Frequency tuner: 50 KHz
 MER measurement range: 19~38dB±2dB
 BER Pre/post FEC measurement range: 10E-2 to 10E-8
 Tuning range: 55.25 - 865.25 MHz
 Tuning mode: By channel or by frequency

Channel Scan

Number of Channels: 200 channels max.
 Scanning speed: 4 channels / sec
 Zoom: 1X, 2X, 4X three levels of magnification or full Channel Plan scan
 Memory: 100 Groups, each group Max 200 Channels

Spectrum Analysis

Bandwidth: Range between 10 MHz, 25 MHz, 50 MHz, and full span

Channel Plan

Number of Channels: 200 channels max
 Number of Learned Channel Plan: 10 max

Power Supply

Battery: 7.2V 1.6AH Ni-MH battery,
 Charger: AC 100V-240V/50Hz
 Working Time: Average 5-8 hours (full charged battery).
 Charging Time: 5-10 hrs.

Dimensions

Height: 9.5"
 Depth: 3.0"
 Width: 4.0"



CT-DLM-CABLE
 Interconnect cable, meter
 to PC via RS232C
 (Sold Separately)