


DT-CAT6-RJ45-SHLD-50

DataTronix Shielded External Ground Pass Through RJ45 Modular Plugs with Cap45® Cat6 STP

Solid 23AWG (Cat6), Conductor Type(s):
Solid and Stranded, Hi/Lo Stagger, Wire Conductors
0.041 - 0.047" (1.05-1.2mm), Max Cable OD 0.315"
(8mm), UL94 V0 Commercial (Plenum LSZH) Rated,
Green Tint.

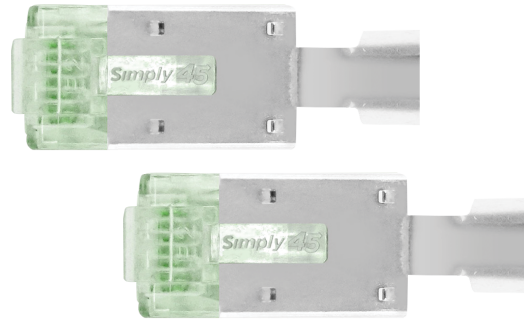

DT-CAT6-RJ45-SHLD-50 - 50/container

Optional Products

DT-RJ45-CRIMPTOOL -ProSeries Heavy Duty RJ45 Crimp Tool

ProSeries Heavy Duty RJ45 Crimp Tool

DT-RJ45-RPLBLADES - Replacement Blades for DT-RJ45-CRIMPTOOL

DT-CAT6-RJ45-SHLD-50

Category Type	Cat6
Connector Style	Pass-Through with Cap45
Wire Alignment	Hi/Lo Stagger
Cable Type	STP
AWG	23AWG Solid
Conductor Range	1.05mm - 1.20mm (0.041"-0.047")
Max Cable OD	8.0mm (0.315")
Plug Material	Polycarbonate
Material Rating	UL94 V0 Commercial (Plenum, LSZH) Rated
Plug Color	Green Tint
Patent Number	10,811,831 B1
Contact Design	3 Prong Style
Contact Material	Phosphor Bronze
Base Contact Plating	100μ of nickel plating
Surface Contact Plating	50μ 24ct Gold
UL & cUL Listed	E520614
Compliant	TAA, P65
HDBaseT	Approved
Dimensions: (H x W x D)	3.9 x 3.7 x 3.2" (99 x 94 x 81 mm)
Weight	0.480 lbs. (0.218 kg)
Warranty	Lifetime Limited Warranty