SECURITY TRONIX®

THE IMAGE OF QUALITY

ST-IP-TEST-BAT W/HSG

Replacing the battery and back cover on the ST-IP-TEST Test Meter

Replacement Parts

Battery

Back Cover

Tools Needed

Phillips Head Screwdriver

Step 1

On the back of the meter, open the battery door and remove the old battery.

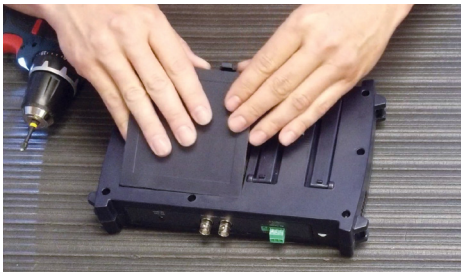

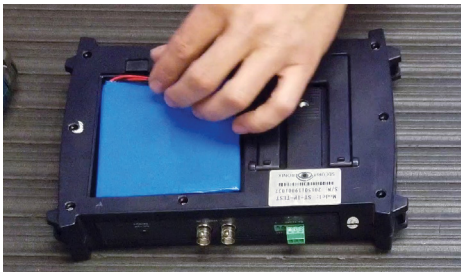

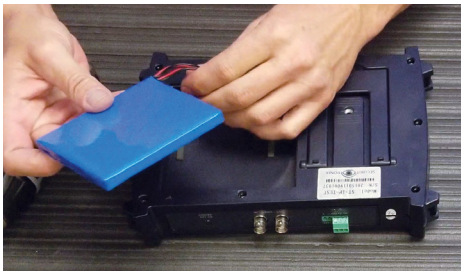

Step 2

Using your screwdriver, remove the screws from the back cover of the meter. Lift the back cover off the meter and save the existing screws for the new back cover.

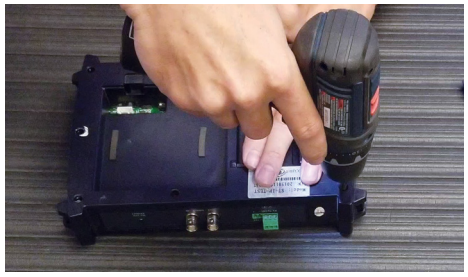

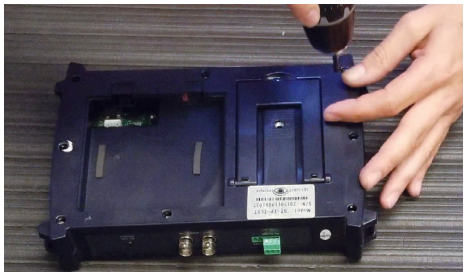

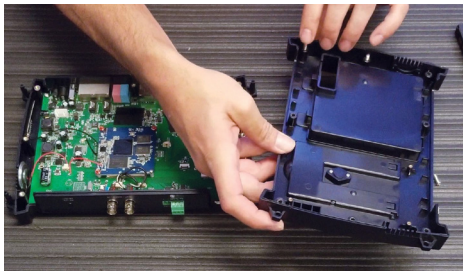

Step 3

Take the new back cover and attach the battery cable to the HD board on the meter.

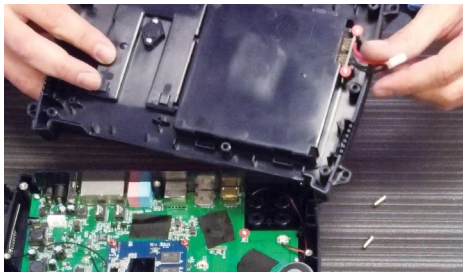

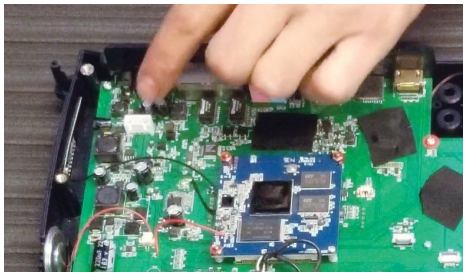

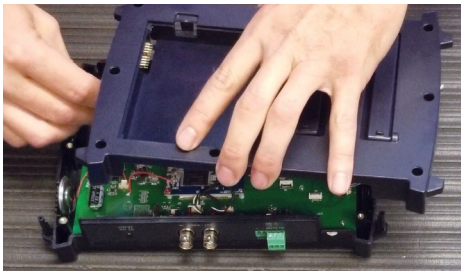

SECURITY TRONIX®

THE IMAGE OF QUALITY

Step 4

Once the battery cable is attached, align the back cover to the meter, screw the new back on to the meter using the existing screws from the original back cover.

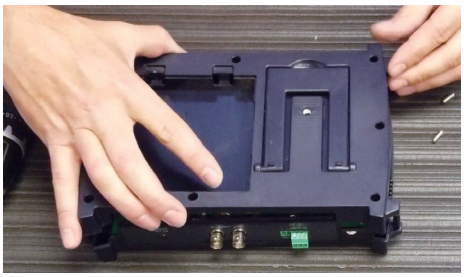

Step 5

Install the new battery into the battery area and replace the door over the battery.

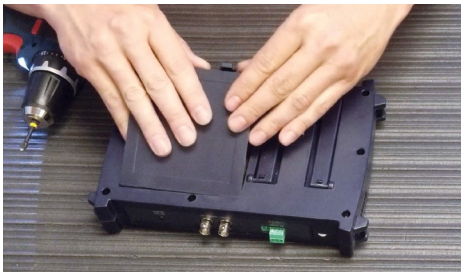

Step 6

Turn the meter over and power the meter ON to make sure everything is installed properly.

The replacement of the new battery and back cover of the ST-IP-TEST meter is complete.

SECURITY TRONIX®

THE IMAGE OF QUALITY

- SAME DAY SHIPPING ON ORDERS RECEIVED BY 5PM ET
- PRE-SALES AND POST-SALES SUPPORT
- 24/7/365 US-BASED TECHNICAL SUPPORT VIA PHONE AT 610-429-0334