

FT-EMCU-1G-SM-SX-MINI-KIT | FT-EMCU-1G-SM-DX-MINI-KIT


Unmanaged Industrial Media Converter Kit

Industrial Media Converters are used for converting copper twisted pair Ethernet to fiber cable Ethernet in locations that are exposed to harsh industrial operating conditions, such as high or low temperatures. While converting copper to fiber is mostly used for an extended data transmission distance of a network, many deployments are done to eliminate EMI and RFI interference that can occur on a copper Ethernet as fiber optic cable is immune to EMI and RFI noise.


This kit contains two (2) mini unmanaged 10/100/1000 Base-TX/RX port designed medias converters to transmit and receive 10/100/1000Mbps data over an SFP port. Units feature MDI/MDIX Full/Half Duplex Auto-Negotiation, 10/100/1000Base Auto-sensing, and compatibility with major Network Protocols. The optical interfaces operate at a 1000Mbps Ethernet rate. Redundant ring and plug-and-play performance ensures ease of installation - no user electrical or optical adjustments are required. Features included are low power consumption LED indicators for monitoring equipment link, operating status activity, and auto-resettable voltage transient fuses. Additionally, they are designed with DIN Rail or Wall mount, are fan-less, and have a IP40 rated Aluminum enclosure. With a wide range 12- 55VDC input voltage, these units are outstanding products for Gigabit Ethernet signals in industrial Layer 2 Managed Network Installations.



FT-EMCU-1G-SM-SX-MINI-KIT



FT-EMCU-1G-SM-DX-MINI-KIT



Key Features

- 1X 1000Base-X SC Selectable Fiber Ports
- 1X10/100/1000Base-T Copper Ports
- Packet Forwarding Rate: 2.976Mpps
- Backplane Bandwidth: 4Gbps
- Network Standards: IEEE802.3
- 12V DC Input for non PoE/48V DC Input for PoE
- Operating Temp: -40 - 167°F (-40 - 75°C)
- Common Model 6KV Lightning Protection
- IP40 rate
- MTBF ≥100,000hrs

Models


FT-EMCU-1G-SM-SX-MINI-KIT - Simplex Version

FT-EMCU-1G-SM-DX-MINI-KIT - Duplex Version

FT-EMCU-1G-SM-SX-MINI-KIT | FT-EMCU-1G-SM-DX-MINI-KIT

Unmanaged Industrial Media Converter Kit

Dimensions

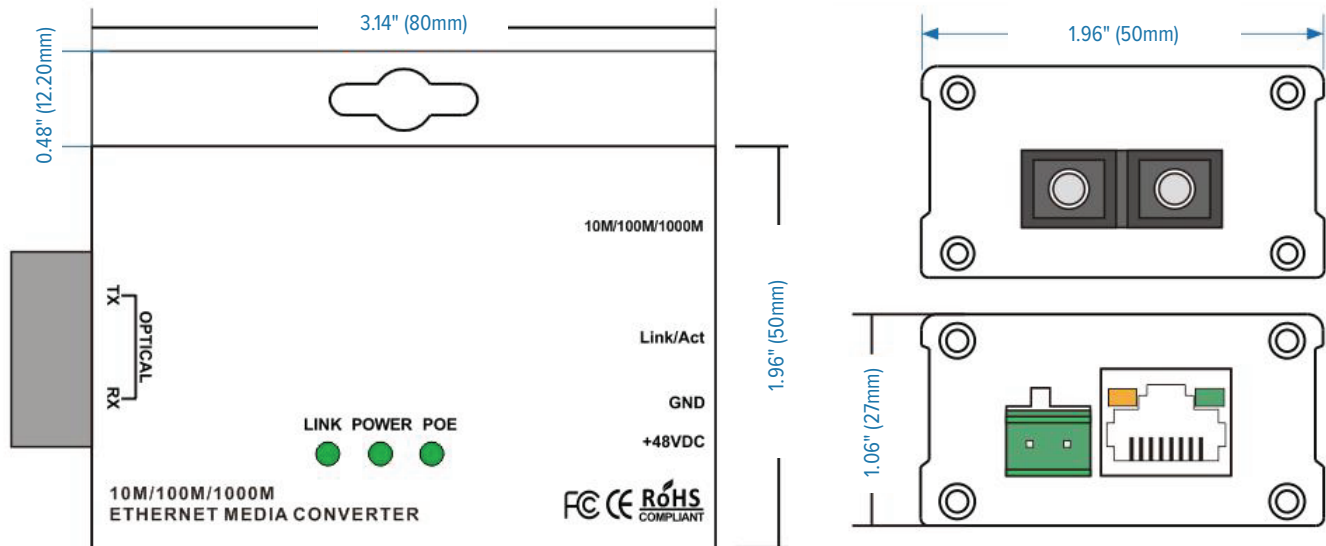

Connectors	
Optical	SC, One Single Fiber or Dual Fibers
Power	Terminal Block
Ethernet	RJ45

Interface	
Fiber Port	1×1000 Base-X Fiber port
RJ45 Port	1×10/100/1000Base-T Copper Ports, support MDI/MDIX
LED	Power, SYSTEM, LINK/ACT

Optical Parameter	
Fiber	Single-mode / Multimode
Wavelengths (MM)	1310/1550nm
Wavelengths (SM)	1310/1550nm

Power Parameter	
Input	12V DC (non PoE)/48V DC (PoE)
Power	1.4W
Power Consumption	9W Max
Current Protection	Auto Resettable Solid – State Current Limiters
Power port	DC Adapter

Data	
Data Interface	Ethernet
Data Rate	10/100/1000 Mbps IEEE 802.3 Compliant Full Duplex or Half Duplex Electrical Port / Full Duplex Optical Port

Mechanical Property	
Case	Aluminum alloy, IP30 Rate
Dimension	3.27 x 1.98 x 1.02" (80.0 × 51.5 × 27.1mm)
Weight	<1.3lbs (600g)
Installation	Wall-mounted/Din-Rail selectable
Operating Temperature	-40 - 167°F (-40 - 75°C)
Storage Temperature	-49 - 203°F (-45 - 95°C)
Operating Humidity	5 - 95% (No condensation)
MTBF	> 100,000 hrs
Warranty	1-year Limited Warranty

Properties	
Switching delay	≤1.372us
MAC address table	1K
Buffer	1Mb