



ST-GNVR8-P8

8 Channel Network Video Recorder




Key Features

- Supports Ultra 265/H.265/H.264 video formats
- 8 channel
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Supports 1-ch HDMI, 1-ch VGA, HDMI at up 4K
- (3840 x 2160) resolution
- HDMI and VGA simultaneous output
- Up to 8MP resolution recording
- 1 SATA HDD up to 10 TB

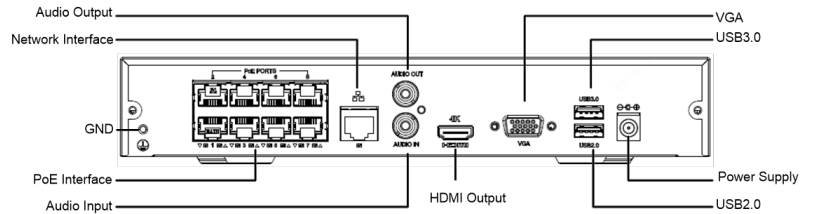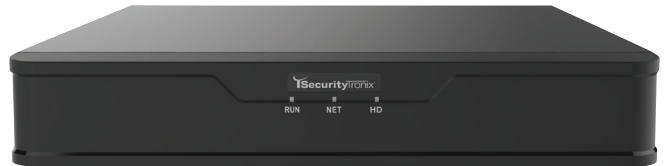

Dimensions

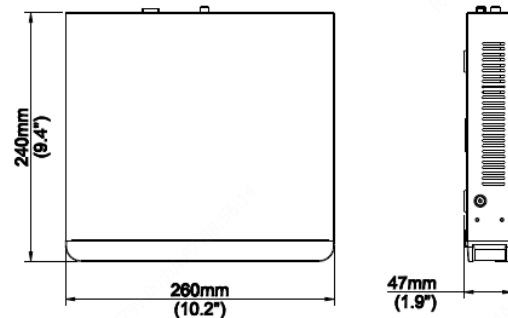

Available Accessories



Hard Drive

- WD10PURX
- WD20PURX
- WD30PURX
- WD40PURX
- WD60PURX
- WD82PURX
- WD102PURX

ST-GNVR8-P8 8 Channel Network Video Recorder

Video/Audio Input	
IP Video Input	8-ch
Two-way Audio Input	1-ch, RCA

Network	
Incoming Bandwidth	80Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE

Video/Audio Output	
HDMI/VGA Output	HDMI: 3840 x 2160/30Hz, 1920 x 1080p/60Hz, 1920 x 1080p/50Hz, 1600 x 1200/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz, 1024 x 768/60Hz VGA: 1920 x 1080p/60Hz, 1920 x 1080p/50Hz, 1600 x 1200/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz, 1024 x 768/60Hz
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	8-ch
Corridor Mode Screen	3/4/5/7/9

Decoding	
Decoding format	Ultra 265/H.265/H.264
Liveview/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	2 x 4k@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30

Hard Disk	
SATA	1 SATA interface
Capacity	up to 10TB for each disk

Smart	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking, Object Left Behind, Object Removed
VCA Search	Face search, Behavior search
Statistical Analysis	People counting

External Interface	
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0

PoE	
Interface	8 RJ45 10M/100M self-adaptive Ethernet Interface
Max Power	Max 30W for single port Max 75W in total
Standards	IEEE 802.3at, IEEE 802.3af

General	
Power Supply	52V DC Power Consumption: ≤8 W (without HDD)
Working Environment	14 - 131°F (-10 - 55°C), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	10.2" × 9.4" × 1.9" (260 x 240 x 47 mm)
Weight (without HDD)	2.20 lb (1 kg)
Warranty	2-Year Limited Warranty