


## ST-IP2FD-LS-2.8 | ST-IP2FD-LS-4

### 2MP IP Fixed Lens Dome Camera

Looking for high quality HD IP video surveillance cameras but do not want to pay the high prices? SecurityTronix Lite Series has your solution. The Lite Series 2 Mega Pixel High Resolution, IP fixed lens camera transmits and receives video and controls data over a single network cable. This dome camera packs a big punch and is suited for any commercial application. The free STGO2 app allows users to view their cameras on their mobile devices anytime with ease. Cameras are Plug n Play when paired with SecurityTronix Network Video Recorders (NVR) that have built in PoE. Need to make sure you are not going to lose recorded data... The Lite Series cameras connect to SecurityTronix ST LIVE cloud based platform for retention of recorded video off site. The robust design includes an IP67 weather rating, Digital Wide Dynamic Range (DWDR) to provide a clear image when a lighting change occurs behind the subject being viewed, and IR LEDs allow the camera to see in total darkness up to 98 feet. The camera can be powered via PoE (power over Ethernet) or locally with a 12V DC power supply. Power supply not included.



#### Dimensions

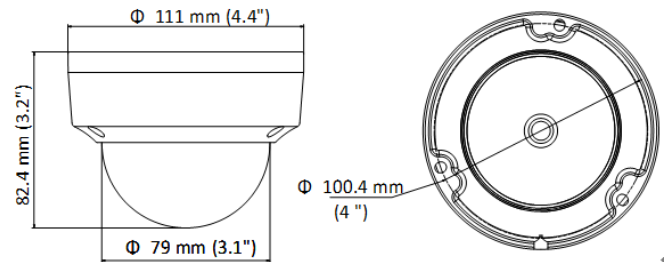

#### Key Features

- 1/2.8" progressive scan CMOS
- 1920 × 1080@30fps
- 2.8 and 4 mm fixed lens
- H.265+, H.265, H.264+, H.264
- Dual stream
- Digital WDR (Wide Dynamic Range)
- 3D DNR (Digital Noise Reduction)
- Up to 98' IR range
- PoE (Power over Ethernet)
- IP67, IK10


#### Available Accessories



Wall Mount Camera Mount  
ST-WM1



Wall Mount Camera Mount  
ST-WM1B



Junction Box Camera Mount  
ST-JB1



# ST-IP2FD-LS-2.8 | ST-IP2FD-LS-4 2MP IP Fixed Lens Dome Camera

Camera		Smart Features	
Image Sensor	1/2.8" progressive scan CMOS	Region of Interest	1 fixed region for main stream and sub-stream
Min. Illumination	Color: 0.01 Lux @(F1.2, AGC ON), 0.028Lux @ (F2.0, AGC ON)		
Shutter Speed	1/3 s to 1/100, 000 s		
Slow Shutter	Yes		
Auto-Iris	No		
Day & Night	IR cut filter		
Digital Noise Reduction	3D DNR		
WDR	Digital WDR (Wide Dynamic Range)		
Angle Adjustment (Bracket)	Pan: 0° to 355°, tilt: 0° to 70°		
Lens		Network	
Focal Length	2.8 and 4 mm	Alarm Trigger	Motion detection, video tampering alarm, illegal login
Aperture	F2.0	Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour
Focus	No	General Function	Anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark
FOV	2.8 mm, horizontal FOV 114°, vertical FOV 62°, diagonal FOV 135° 4 mm, horizontal FOV 86°, vertical FOV 46°, diagonal FOV 102°	Firmware Version	5.5.2
Lens Mount	M12	API	ONVIF (PROFILE S, PROFILE G), ISAPI
		Simultaneous Live View	Up to 6 channels
		User/Host	Up to 32 users 3 levels: Administrator, Operator and User
		Client	STGO2, Guarding Vision Client
		Web Browser	IIE7+, Chrome18-42, Firefox5.0+, Safari5.02+
IR		Interface	
IR Range	Up to 98'	Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
Wavelength	850nm		
Compression Standard		General	
Video Compression	Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG	Operating Conditions	-22 °F to 122 °F (-30 °C to 50 °C), humidity: 95% or less (non-condensing)
H.264 Type	Baseline Profile/Main Profile/High Profile	Power Supply	12 VDC ± 25%, 5.5 mm coaxial power plug PoE (802.3af, class 3)
H.264+	Main stream supports	Power Consumption and Current	12 VDC, 0.4 A, Max: 5 W PoE: (802.3af, 36 V to 57 V), 0.2 A to 0.13 A, Max: 7 W
H.265 Type	Main Profile	Protection Level	IP67, IK10 TVS 2000V lightning protection, surge protection and voltage transient protection
H.265+	Main stream supports	Material	Metal & Plastic
Video Bit Rate	32 Kbps to 8 Mbps	Dimensions	Camera: 4.4" × 3.2" (Ø 111 mm × 82.4 mm) With package: 5.3" × 5.3" × 4.3" (134 × 134 × 108 mm)
Image		Weight	Camera: Approx. 0.9 lb. (410 g) With package: Approx. 1.3 lb. (610 g)
Max. Resolution	1920 × 1080	Warranty	2-Year Limited Fixed Camera Warranty
Main Stream Max. Frame Rate	50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)		
Sub-stream Max. Frame Rate	50Hz: 25fps (640 × 480, 640 × 360, 320 × 240) 60Hz: 30fps (640 × 480, 640 × 360, 320 × 240)		
Image Enhancement	BLC, 3D DNR		
Image Setting	Saturation, brightness, contrast, sharpness, AGC, white balance adjustable by client software or web browser		
Day/Night Switch	Auto, scheduled		