

ST-TVI2FTD-P-2.8 | ST-TVI2FTD-P

2MP TVI PoC Fixed Lens Turret Dome Camera


Deliver a High Definition video signal to your recorder while allowing both power and control signals to transmit over one coaxial cable from the DVR to the camera. SecurityTronix uses PoC (Power over Coax) and CoC (Control over Coax) to accomplish this. Now you can eliminate the need for additional power cable, and cut costs, while delivering high definition quality images and further transmission distances for your job sites. This solution has many installers boasting their installations are fast, easy, and saving their customers money.



Key Features

- PoC.af - Power over Coax
- CoC - Control over Coax
- UTC - Up the Coax
- 2 MP, 1920 x 1080 @30fps
- 2.8 mm and 3.6 mm fixed focal lens
- Ultra-Low Light
- 120 dB true WDR, 3D DNR
- EXIR 2.0, Smart IR, up to 131' IR distance
- IP67

Dimensions

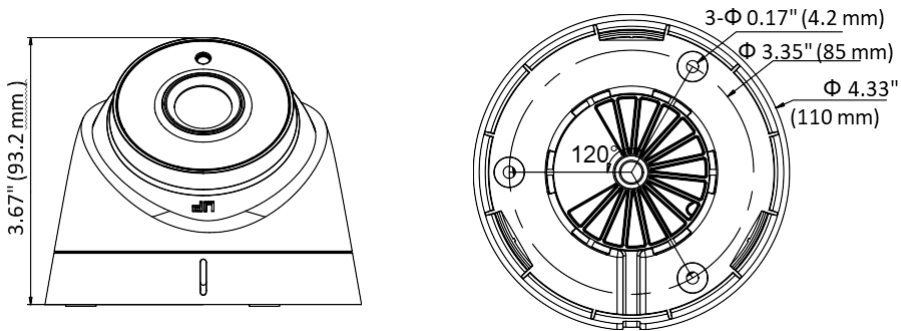

Available Accessories



Wall Mount
ST-WM5



Junction Box
ST-JB4



ST-TVI2FTD-P-2.8 | ST-TVI2FTD-P 2MP TVI PoC Fixed Lens Turret Dome Camera

Camera		Interface	
Image Sensor	2.0 megapixel progressive scan CMOS	Video Output	1 HD analog output
Signal System	PAL/NTSC		
Frame Rate	PAL: 1080p@25fps NTSC: 1080p@30fps	General	
Resolution	1920 (H) × 1080 (V)	Operating Conditions	-40 °F to 140 °F (-40 °C to 60 °C), humidity: 90% or less (non-condensation)
Min. illumination	Color: 0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR	Power Supply	12 VDC ±25%/PoC.af
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s	Power Consumption	Max. 3.6 W
Slow Shutter	Max. 16 times	Ingress Protection	IP67
Lens	2.8 mm and 3.6 mm fixed lens	Material	Metal & Plastic
Horizontal Field of View	103.5° (2.8 mm), 82.6° (3.6 mm)	IR Range	Up to 131'
Lens Mount	M12	Communication	UTC (Up the coax), Protocol: (TVI output)
Day & Night	IR cut filter	Dimensions	Φ 4.33" × 3.67" (Φ 110 mm × 93.2 mm)
Angle Adjustment	Pan: 0° to 360°, Tilt:0° to 75°, Rotate: 0° to 360°	Weight	0.77 lb. (350 g)
Synchronization	Internal synchronization	Warranty	2-Year Limited Fixed Camera Warranty
WDR (Wide Dynamic Range)	> 120 dB°		
Menu			
AGC	Support		
Day/Night Mode	Auto/Color/BW (Black and White)		
White Balance	ATW (Auto Trace White) MWB (Manual White Balance)		
Privacy Mask	ON/OFF, 4 programmable privacy masks		
Motion Detection	4 programmable motion areas		
Backlight Compensation	WDR/BLC/OFF		
3D DNR (Digital Noise Reduction)	Level 1 to 10		
Language	English, Chinese		
Functions	Brightness, Sharpness, Mirror, Smart IR		