

## ST-TVI5FB-P-2.8 | ST-TVI5FB-P

### 5MP TVI PoC Fixed Lens Bullet Camera


Deliver a High Definition video signal to your recorder while allowing both power and control signals to transmit over one coaxial cable from the DVR to the camera. SecurityTronix uses PoC (Power over Coax) and CoC (Control over Coax) to accomplish this. Now you can eliminate the need for additional power cable, and cut costs, while delivering high definition quality images and further transmission distances for your job sites. This solution has many installers boasting their installations are fast, easy, and saving their customers money.



#### Key Features

- PoC.af - Power over Coax
- CoC - Control over Coax
- UTC - Up the Coax
- 5 MP, 2560 x 1944 @20fps
- 2.8 mm and 3.6 mm fixed lens
- EXIR 2.0, smart IR, up to 65' IR distance
- OSD menu, 2D DNR, DWDR
- IP67

#### Dimensions

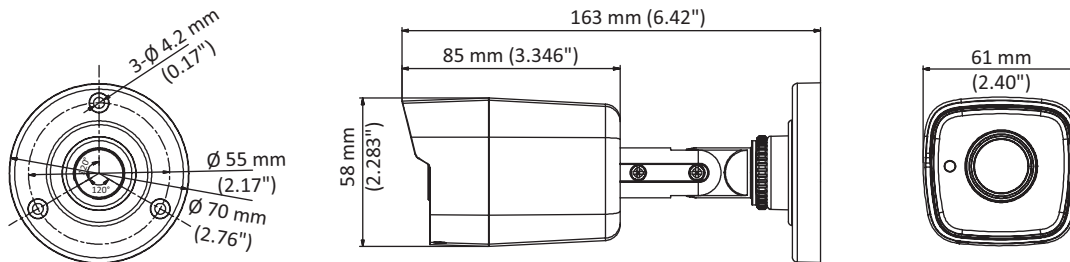

#### Available Accessories



Junction Box  
ST-JBMB



# ST-TVI5FB-P-2.8 | ST-TVI5FB-P 5MP TVI PoC Fixed Lens Bullet Camera

Camera	
Image Sensor	5 MP CMOS image sensor
Resolution	2560 (H) × 1944 (V)
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Lens	2.8 mm and 3.6 mm fixed focal lens
Horizontal Field of View	85.5° (2.8 mm), 80.1° (3.6 mm)
Lens Mount	M12
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to 180°; Rotate: 0° to 360°
Synchronization	Internal synchronization
Frame Rate	PAL: 5 MP@20fps, 4 MP@25fps, 1080p@25fps NTSC: 5 MP@20fps, 4 MP@30fps, 1080p@30fps

Menu	
AGC	Support
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	ATW (Auto Trace White) MWB (Manual White Balance)
BLC	Support
DWDR (Digital Wide Dynamic Range)	Support
Language	English
Functions	Brightness, Sharpness, DNR, Mirror, Smart IR

Interface	
Video Output	1 HD analog output
General	
Operating Conditions	-40 °F to 140 °F (-40 °C to 60 °C), humidity: 90% or less (non-condensing)
Power Supply	12 VDC ± 25%/PoC.af
Power Consumption	Max. 5.4 W
Protection Level	IP67
Material	Metal
IR Range	Up to 65'
Communication	UTC (Up the coax), Protocol: (TVI output)
Dimensions	2.28" × 2.40" × 6.42" (58 mm × 61 mm × 163 mm)
Weight	Approx. 0.77 lb. (350 g)
Warranty	2-Year Limited Fixed Camera Warranty