




I 、 components description

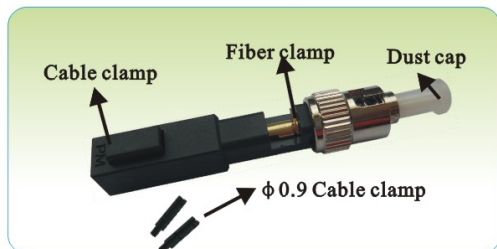


II 、 Tools prepare

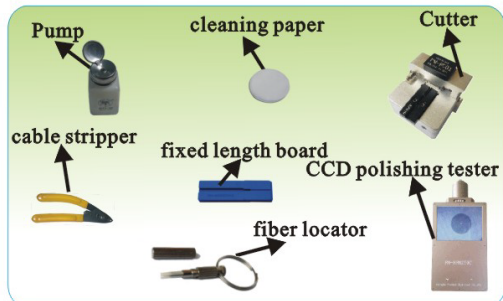


III 、 Stripping cable and coating and mounted fiber optic cable clamp

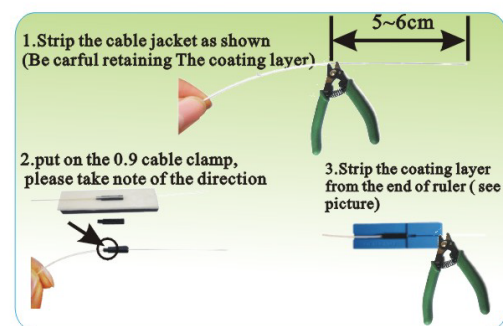


IV 、 Cutting the fiber (different cutting tool may differ, please refer to the size label on the box)

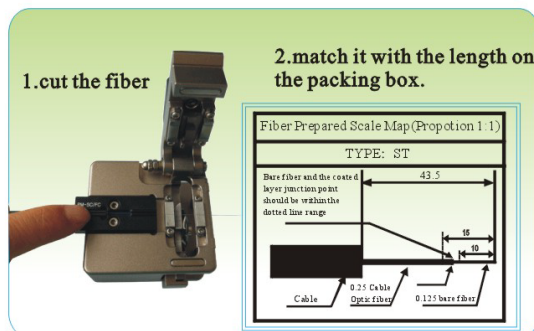

V 、 Pull the fiber through and clamp it


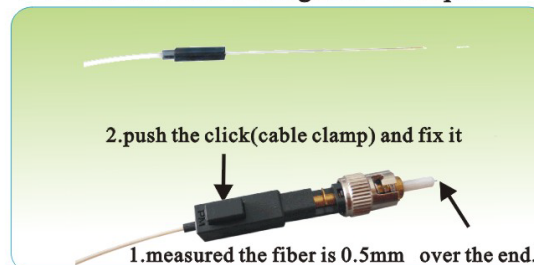


VI 、 Fix the fiber(must be sequented by step 1 2 3)

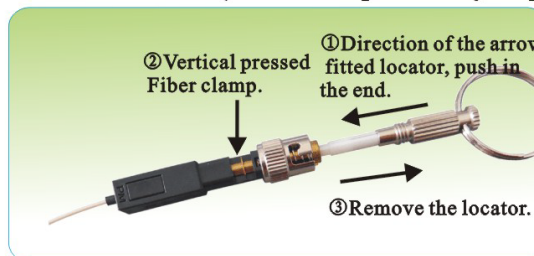

VII 、 clean the fiber end, check the end results, drop some matching liquid on the end

Clean the ferrule with the professional fiber cleaner, press lightly according to the arrow. Avoid overexertion damage the end.

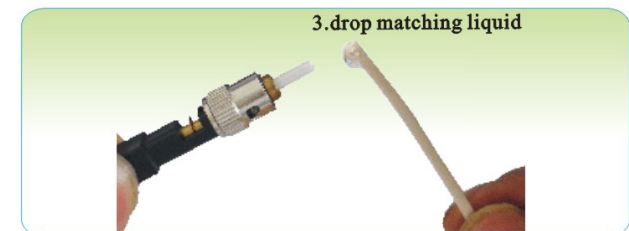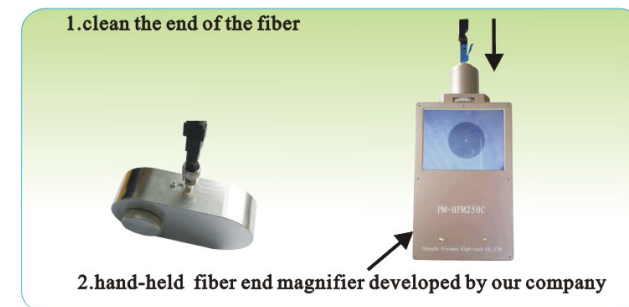

VIII 、 unload steps



If you experience any issues using these fiber connectors, please contact FIBER-TRONIX Tech Support: (610) 428-1921

FIBER-TRONIX 1085 Andrew Dr. Ste A West Chester PA 19380